

SPECIFICATIONS

FD-11634

8-Channel Sound and Vibration Input Device for FieldDAQ

Conditions

Specifications are typical and valid at -40 °C to 85 °C unless otherwise noted.

Input Characteristics

Number of channels	8 analog input channels
Isolation	Galvanic isolation between channels and to chassis
Input voltage range (AI+ to AI-)	±10 V, ±1 V
ADC resolution	24 bits
Type of ADC	Delta-Sigma (with analog prefiltering)
Sample mode	Simultaneous
Input coupling	Software-selectable AC/DC
TEDS support	IEEE 1451.4 TEDS Class I
TEDS capacitive drive	5,000 pF
Timebases (f_M) ¹	
Frequency	13.1072 MHz, 12.8 MHz, 12.288 MHz, 10.24 MHz
Accuracy	±30 ppm maximum

¹ Base clocks can be synchronized with other FieldDAQ devices using the network synchronization feature.

Sampled data rate range (f_s)

Minimum	500 Sample/s
Maximum	102.4 kSample/s

Sampled data rates (f_s)

Refer to the following table for sample data rates supported for each timebase

Table 1. Timebases (f_M) and Supported Sampled Data Rates (f_s), (kSamples/s)

13.1072 MHz	12.8 MHz	12.288 MHz	10.24 MHz
102.4	100.0	96.0	80.0
51.2	50.0	48.0	40.0
34.133	33.333	32.0	26.667
25.6	25.0	24.0	20.0*
20.48	20.0	19.2	16.0
17.067	16.667	16.0*	13.333
12.8	12.5	12.0	10.0*
10.24	10.0	9.6	8.0
8.533	8.333	8.0*	6.667
6.4	6.25	6.0	5.0*
5.12	5.0	4.8	4.0
4.267	4.167	4.0*	3.333
3.2	3.125	3.0	2.5*
2.56	2.5	2.4	2.0
2.133	2.083	2.0*	1.667
1.6	1.563	1.5	1.25*
1.28	1.25	1.2	1.0
1.067	1.042	1.0*	0.833
0.8	0.781	0.75	0.625

Table 1. Timebases (f_M) and Supported Sampled Data Rates (f_S), (kSamples/s) (Continued)

13.1072 MHz	12.8 MHz	12.288 MHz	10.24 MHz
0.64	0.625	0.6	0.5
Note: For sample rates that can be obtained using two different timebases, the lowest noise (highest resolution) option is indicated with an asterisk (*).			

Input impedance (AI+ to AI-)	1 M Ω
Input capacitance (AI+ to AI-)	520 pF
AC coupling response	
-3 dB	0.53 Hz
-0.1 dB	3.48 Hz

Table 2. Accuracy

Nominal Input Range	Temperature	Gain Error (% of Reading)	DC-Coupled Offset Error (% of Range, mV)
± 10 V	5 °C to 40 °C	0.05%, typical	0.012%, 1.2 mV, typical
		0.1%, maximum	0.028%, 2.8 mV, maximum
	-40 °C to 85 °C	0.15%, maximum	0.0078%, 7.8mV, maximum
± 1 V	5 °C to 40 °C	0.06%, typical	0.02%, 0.2 mV, typical
		0.12%, maximum	0.04%, 0.4 mV, maximum
	-40 °C to 85 °C	0.2%, maximum	0.14%, 1.4 mV, maximum

AC-coupled residual offset	
5 °C to 40 °C	<5 mV typical
-40 °C to 85 °C	<50 mV typical

Table 3. Stability

Input Range	Gain Drift	DC-Coupled Offset Drift
±10 V	±15 ppm/°C	±50 μV/°C
±1 V	±20 ppm/°C	±15 μV/°C

Gain mismatch (channel-to-channel, DC to 40 kHz) 0.1 dB maximum

Phase mismatch (channel-to-channel, 1 kHz to 40 kHz) 0.017°/kHz maximum

Phase nonlinearity ($f_s = 102.4$ kSample/s, 1 kHz to 40 kHz) 0.18° maximum

Crosstalk (1 kHz) -120 dB

CMRR to chassis/earth ($f_{in} = 60$ Hz) 105 dB

Table 4. Input Noise with Brickwall Filter

Input Range	1 kSample/s	10 kSample/s	102.4 kSample/s
±10 V	6.0 μV RMS	9 μV RMS	25 μV RMS
±1 V	0.7 μV RMS	1.2 μV RMS	3.5 μV RMS

Table 5. Dynamic Range (at 1 kHz Input Frequency, -60 dB Amplitude) with Brickwall Filter

Data Rate (kSample/s)	ADC Decimation Ratio	Input Range	
		±10 V	±1 V
102.4	64	108	106
51.2	128	111	109
25.6	256	114	112

Table 5. Dynamic Range (at 1 kHz Input Frequency, -60 dBFS Amplitude) with Brickwall Filter (Continued)

Data Rate (kSample/s)	ADC Decimation Ratio	Input Range	
		±10 V	±1 V
12.8	512	117	115
6.4	1024	120	118

Spectral noise density ($f_s = 102.4$ kSample/s)


±10 V input range

$$\frac{120nV}{\sqrt{Hz}} \text{ at } 1kHz$$

±1 V input range

$$\frac{16nV}{\sqrt{Hz}} \text{ at } 1kHz$$

Figure 1. Spectral Noise Density versus Frequency

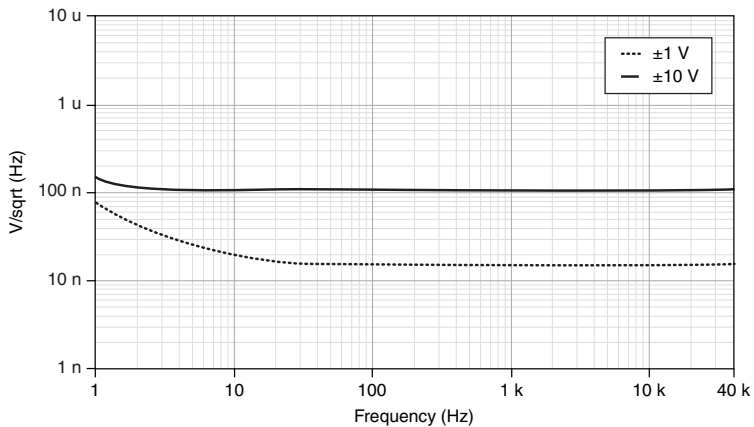

Spurious Free Dynamic Range (SFDR), >130 dBFS
(1 kHz, -60 dBFS)

Table 6. Total Harmonic Distortion (THD)

Input Range	1 kHz	20 Hz to 20 kHz	20 kHz to 40 kHz
±10 V	-105 dB	-98 dB	-90 dB
±1 V	-105 dB	-88 dB	-75 dB

Table 7. Total Harmonic Distortion + N (THD+N)

Input Range	20 Hz to 20 kHz	20 kHz to 40 kHz
±10 V	-98 dB	-90 dB
±1 V	-88 dB	-75 dB

Table 8. Intermodulation Distortion (IMD)

Input Range	SMPTE 60 Hz + 7 kHz	CCIF 11 kHz + 12 kHz
±10 V	-98 dB	-93 dB
±1 V	-98 dB	-85 dB

Test standards: SMPTE 60 Hz + 7 kHz, amplitude ratio 4:1 with total amplitude at 0 dBFS, and CCIF 11 kHz + 12 kHz, amplitude ratio 1:1 with each tone amplitude at -6 dBFS, up to 5th order harmonic.

IEPE

Excitation current (software-selectable on/off)	
Minimum	4 mA
Typical	4.17 mA
Excitation noise	4 nA RMS, 0.1 Hz to 40 kHz BW
Short circuit detection	
Detection threshold (AI+ to AI-)	180 mV
Detection threshold hysteresis	50 mV
Compliance voltage	23 V maximum



Note If you are using an IEPE sensor, use the following equation to ensure your configuration meets the IEPE compliance voltage range: ($V_{\text{bias}} \pm V_{\text{full-scale}}$) must be 0 V to 23 V where V_{bias} is the bias voltage of the IEPE sensor, and $V_{\text{full-scale}}$ is the full-scale voltage of the IEPE sensor.


Filtering

Brickwall filter (default)	
Input delay	$36/f_s + 1.5 \mu\text{s}$
Input delay tolerance	±100 ns
Passband frequency	DC to $0.4 \cdot f_s$

Passband flatness with frequency

20 Hz to 20 kHz	±0.03 dB maximum
20 kHz to 40 kHz	±0.05 dB maximum
Stopband frequency	At or above $0.5 \cdot f_s$
Stopband rejection	≥100 dB
Alias-free bandwidth	$0.5 \cdot f_s$

Figure 2. Brickwall Filter Magnitude Response

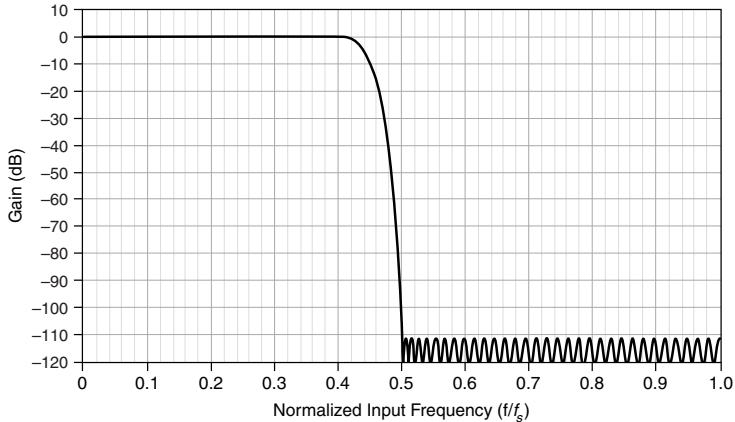

Butterworth filter

Input delay	Refer to the <i>Butterworth Filter Input Delay for Available Timebases (f_M)</i> table.
Input delay tolerance	±100 ns
Filter order	2nd or 4th order

Table 9. Butterworth Filter Cutoff Frequencies (-3 dB Point) for Available Timebases

13.1072 MHz	12.8 MHz	12.288 MHz	10.24 MHz
4096 Hz	4000 Hz	3840 Hz	3200 Hz
2048 Hz	2000 Hz	1920 Hz	1600 Hz
1024 Hz	1000 Hz	960 Hz	800 Hz
512 Hz	500 Hz	480 Hz	400 Hz

Table 9. Butterworth Filter Cutoff Frequencies (-3 dB Point) for Available Timebases (Continued)

13.1072 MHz	12.8 MHz	12.288 MHz	10.24 MHz
256 Hz	250 Hz	240 Hz	200 Hz
128 Hz	125 Hz	120 Hz	100 Hz

Table 10. Butterworth Filter Input Delay for Available Timebases (f_M)

Timebase (MHz)	Cutoff (Hz)	4th Order		2nd Order	
		Input Delay	Maximum Input Delay	Input Delay	Maximum Input Delay
13.1072	4096	436.04 μ s	457.37 μ s	398.66 μ s	405.05 μ s
	2048	537.07 μ s	580.31 μ s	453.34 μ s	466.32 μ s
	1024	740.35 μ s	827.38 μ s	563.08 μ s	589.16 μ s
	512	1.14650 ms	1.32080 ms	782.86 μ s	834.82 μ s
	256	1.95830 ms	2.30460 ms	1.22240 ms	1.32630 ms
	128	3.58310 ms	4.27700 ms	2.08240 ms	2.29240 ms
12.8	4000	446.47 μ s	468.31 μ s	408.19 μ s	414.73 μ s
	2000	549.93 μ s	594.20 μ s	464.18 μ s	477.47 μ s
	1000	758.08 μ s	847.20 μ s	576.55 μ s	603.27 μ s
	500	1.17390 ms	1.35240 ms	801.61 μ s	854.82 μ s
	250	2.00530 ms	2.35980 ms	1.25170 ms	1.35810 ms
	125	3.66910 ms	4.37960 ms	2.13240 ms	2.34740 ms
12.288	3840	465.01 μ s	487.76 μ s	425.14 μ s	431.95 μ s
	1920	572.78 μ s	618.90 μ s	483.46 μ s	497.30 μ s
	960	789.61 μ s	882.44 μ s	600.52 μ s	628.34 μ s
	480	1.22280 ms	1.40870 ms	834.95 μ s	890.38 μ s
	240	2.08880 ms	2.45810 ms	1.30380 ms	1.41460 ms
	120	3.82190 ms	4.56200 ms	2.22120 ms	2.44510 ms

Table 10. Butterworth Filter Input Delay for Available Timebases (f_M) (Continued)

Timebase (MHz)	Cutoff (Hz)	4th Order		2nd Order	
		Input Delay	Maximum Input Delay	Input Delay	Maximum Input Delay
10.24	3200	557.72 μ s	585.01 μ s	509.87 μ s	518.04 μ s
	1600	687.03 μ s	742.38 μ s	579.85 μ s	596.46 μ s
	800	947.23 μ s	1.05860 ms	720.32 μ s	753.71 μ s
	400	1.46700 ms	1.69020 ms	1.00160 ms	1.06820 ms
	200	2.50620 ms	2.94940 ms	1.56430 ms	1.69720 ms
	100	4.58590 ms	5.47410 ms	2.66510 ms	2.93380 ms



Note Input delay is the delay for signal frequencies much lower than the cutoff frequency. Maximum input delay is the peak delay at high signal frequency. The following figures depict how the input delay varies with signal frequency. Refer to the *FD-11634 User Guide* for more information.

Figure 3. Butterworth Filter Magnitude Response (4th Order, with 12.8 MHz Timebase)

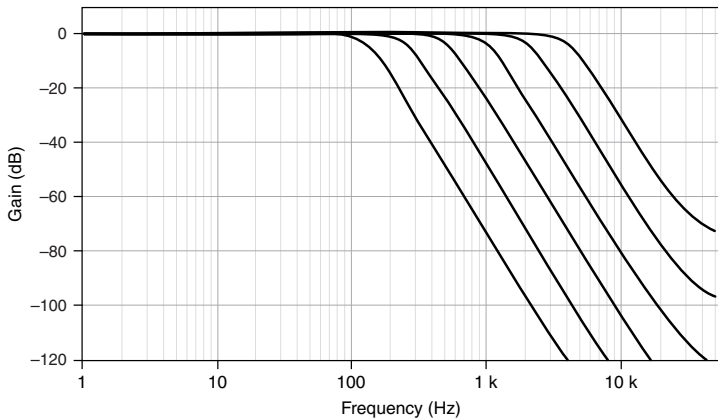


Figure 4. Butterworth Filter Magnitude Response (2nd Order, with 12.8 MHz Timebase)

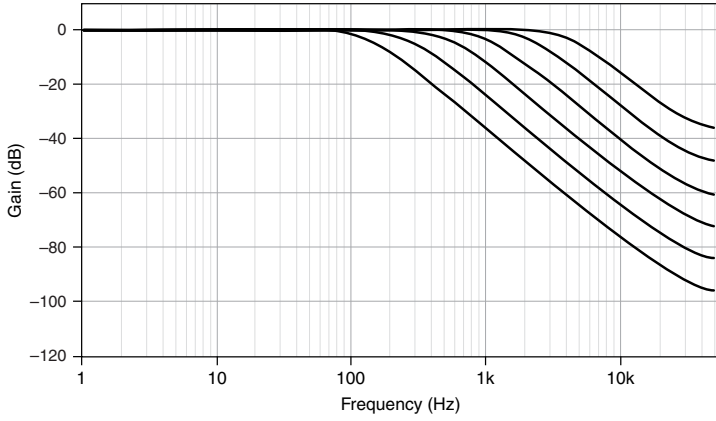


Figure 5. Butterworth Filter Input Delay (4th Order, with 12.8 MHz Timebase, 4 kHz, 2 kHz, 1 kHz Filter)

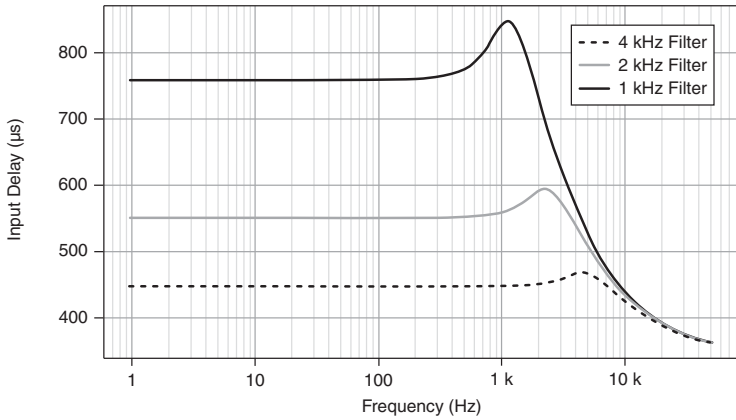


Figure 6. Butterworth Filter Input Delay (4th Order, with 12.8 MHz Timebase, 500 Hz, 250 Hz, 125 Hz Filter)

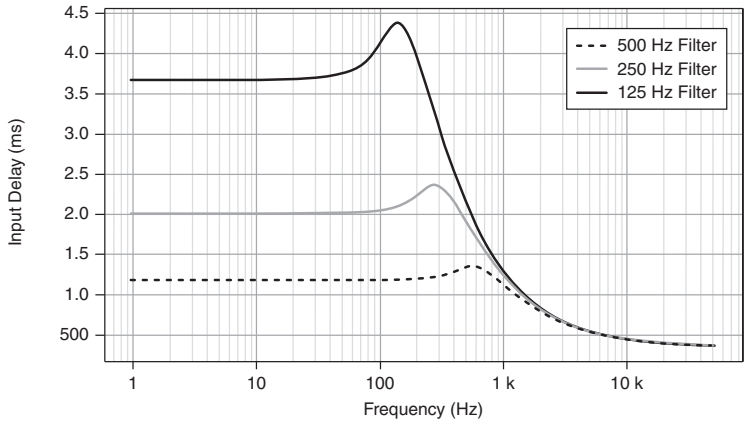


Figure 7. Butterworth Filter Input Delay (2nd Order, with 12.8 MHz Timebase, 4 kHz, 2 kHz, 1 kHz Filter)


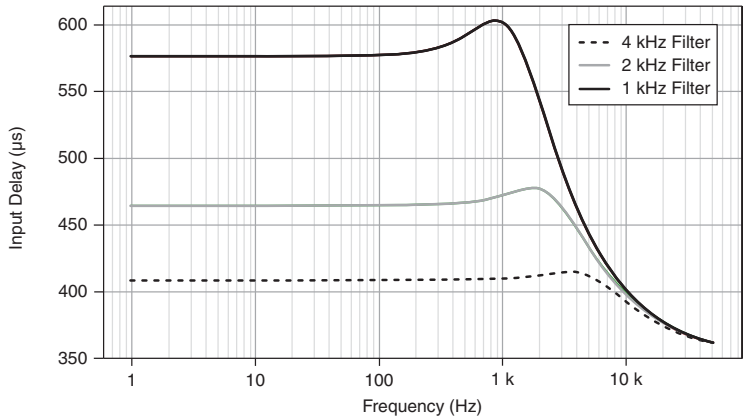



Figure 8. Butterworth Filter Input Delay (2nd Order, with 12.8 MHz Timebase, 500 Hz, 250 Hz, 125 Hz Filter)

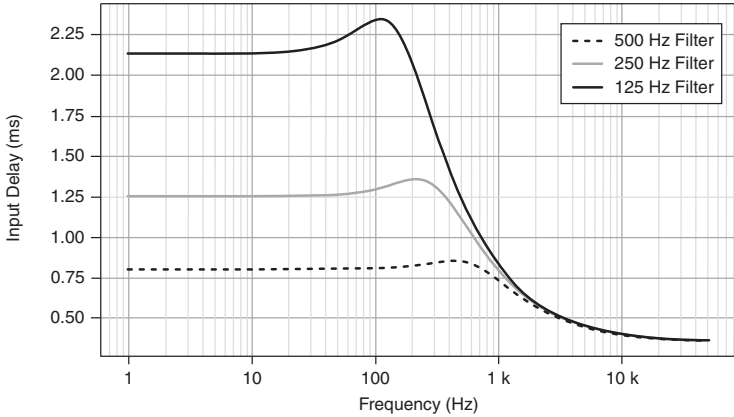

Comb filter

Input delay	$5/f_s + 1.5 \mu s$
Input delay tolerance	$\pm 100 \text{ ns}$
Notches	$f_s, 2f_s, 3f_s, \dots$

Figure 9. Comb Filter Magnitude Response

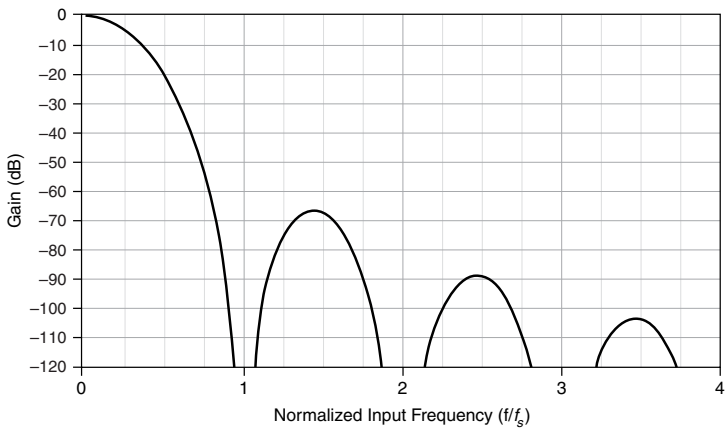

Time-Based Triggers

Type	Start Trigger, Sync Pulse
------	---------------------------

Timing and Synchronization

Protocol	IEEE 802.1AS for network synchronization over 1000 Base-TX, full-duplex
Network synchronization accuracy ²	<1 μ s
Network synchronization accuracy with optimized configuration ³	<100 ns



Note When configured to use IEEE 1588, performance of synchronization may vary from these specifications.

Network Interface

Network protocols	TCP/IP, UDP
Network ports used	HTTP:80 (configuration only), TCP:3580; UDP:5353 (configuration only), TCP:5353 (configuration only); TCP:31415; UDP:7865 (configuration only), UDP:8473 (configuration only)
Network IP configuration	DHCP + Link-Local, DHCP, Static, Link-Local
Default MTU size	1500 bytes

Ethernet

Number of ports	2 8-pin X-coded M12 ports, internally switched ⁴
Network interface	1000 Base-TX, full-duplex; 1000 Base-TX, half-duplex; 100 Base-TX, full-duplex; 100 Base-TX, half-duplex; 10 Base-T, full-duplex; 10 Base-T, half-duplex
Communication rates	10/100/1000 Mbps, auto-negotiated

² I/O synchronization is system-dependent. Assumes the devices are connected in a line topology. For information about network synchronization accuracy, visit ni.com/info and enter Info Code `synccacc`.

³ I/O synchronization is system-dependent. Assumes a system containing one hop. For information about achieving high accuracy synchronization, visit ni.com/info and enter Info Code `edsync`.

⁴ This allows for line topologies or network redundancy.

Maximum cabling distance	100 m/segment
--------------------------	---------------

Maximum hops per line ⁵	15
------------------------------------	----

Power Requirements



Notice The protection provided by the FD-11634 can be impaired if it is used in a manner not described in the *FD-11634 User Guide*.

Voltage input range

V_{in}	9 V DC to 30 V DC
----------	-------------------

V_{aux}	Up to 30 V DC
-----------	---------------

Maximum device power consumption⁶

10 W

Power input connector

5-pin L-coded male M12 connector

Power output connector

5-pin L-coded female M12 connector

Current Limits



Caution Exceeding the current limits may cause damage to the device. Stay below a maximum of 10 A shared between both Input and Aux terminals.

Power IN/OUT terminals

V_{in}	10 A maximum
----------	--------------

V_{aux}	10 A maximum total (combined with V_{in})
-----------	--

Recommended external overcurrent protection

16 A, slow blow fuse

Physical Characteristics

Dimensions	198.5 mm × 77.4 mm × 47.1 mm (7.8 in. × 3.0 in. × 1.9 in.)
------------	--

Weight	1.179 kg (2 lb 9.6 oz)
--------	------------------------

⁵ With default software configuration. For information about creating reliable Ethernet-based systems, visit ni.com/info and enter Info Code `fdenet`.

⁶ The total amount of power drawn by the device from the power input connector, including power delivered to external sensors.

Input connection

Number	8
Type	5-pin A-coded M12 connectors
Torque for M12 connectors (power, Ethernet, input connections)	0.6 N · m (5.31 lb · in.)

Calibration

Calibration interval	1 year
----------------------	--------

Environmental Characteristics

Refer to the *FD-11634 User Guide* for more information about meeting these specifications.

Temperature and Humidity

Temperature

Operating	-40 °C to 85 °C
Storage	-40 °C to 100 °C
Operating and storage humidity	Up to 100% relative humidity, condensing or noncondensing
Ingress protection	IP65/IP67
Pollution Degree	4
Maximum altitude	5,000 m



Note Failure to follow the mounting instructions in the *FD-11634 User Guide* can cause temperature derating.



Note M12 connectors must be mated to cables or have caps installed on them to meet IP65/IP67 requirements. Cover the unused connectors with the included plastic caps whenever water, dust, or dirt are present.



Note Avoid long periods of exposure to sunlight.

Shock and Vibration

Operating vibration

Random	10 g RMS, 5 Hz to 2,000 Hz
Sinusoidal	10 g, 20 Hz to 2,000 Hz 12.4 mm minimum pk-pk displacement, 5 Hz to 20 Hz
Operating shock	100 g, 11 ms half sine, 3 shocks at 6 orientations, 18 total 40 g, 6 ms half sine, 4,000 shocks at 6 orientations, 24,000 total

Environmental Standards

This product meets the requirements of the following environmental standards for electrical equipment.

- IEC 60068-2-1 Cold
- IEC 60068-2-2 Dry heat
- IEC 60068-2-6 Sinusoidal operating vibration
- IEC 60068-2-27 Operating shock
- IEC 60068-2-30 Damp heat cyclic (12 + 12h cycle)
- IEC 60068-2-64 Random operating vibration



Note To verify marine approval certification for a product, refer to the product label or visit ni.com/product-certifications and search for the certificate.

Safety Voltages

Connect only voltages that are within the following limits:

Channel-to-channel isolation

Continuous working voltage ⁷	60 V DC (Dry Locations); 35 VDC (Wet Locations)
Transient overvoltage ⁸	1,000 V RMS, verified by 5 s withstand

⁷ Working voltage rating is the highest RMS value of the AC or DC voltage across the insulation that can continuously occur when the equipment is supplied at rated voltage.

⁸ Withstand rating is the highest RMS value of the AC or DC voltage the insulation can withstand without flashover or breakdown for a specified time.

Channel-to-earth ground isolation

Continuous working voltage	60 V DC (Dry Locations); 35 VDC (Wet Locations)
Transient overvoltage	1,000 V RMS, verified by 5 s withstand
Overvoltage protection ⁹	±30 V between any two pins on the connector

These test and measurement circuits are *not* rated for measurements performed on circuits directly connected to the electrical distribution system referred to as MAINS.

MAINS is a hazardous live electrical supply system to which equipment is designed to be connected to for the purpose of powering equipment. This product is rated for measurements of voltages from specially protected secondary circuits. Such voltage measurements include signal levels, special equipment, limited-energy parts of equipment, circuits powered by regulated low-voltage sources, and electronics.



Warning Do not connect the FD-11634 to signals or use for measurements within Measurement Categories II, III, or IV, or for measurements on MAINS circuits or on circuits derived from Overvoltage Category II, III, or IV which may have transient overvoltages above what the product can withstand. The product must not be connected to circuits that have a maximum voltage above the continuous working voltage, relative to earth or to other channels, or this could damage and defeat the insulation. The product can only withstand transients up to the transient overvoltage rating without breakdown or damage to the insulation. An analysis of the working voltages, loop impedances, temporary overvoltages, and transient overvoltages in the system must be conducted prior to making measurements.

Safety Compliance Standards

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA C22.2 No. 61010-1



Note For UL and other safety certifications, refer to the product label or the [Product Certifications and Declarations](#) section.

⁹ Temporary Overvoltage rating is the overvoltage of relatively long duration.

Electromagnetic Compatibility Standards

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Industrial immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- AS/NZS CISPR 11: Group 1, Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-003: Class A emissions



Note Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.



Note In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia and New Zealand (per CISPR 11) Class A equipment is intended for use only in heavy-industrial locations.



Notice For EMC declarations and certifications, and additional information, refer to the [Product Certifications and Declarations](#) section.



Notice To ensure the specified EMC performance, operate this product only with shielded Ethernet cables.

CE Compliance

This product meets the essential requirements of applicable European Directives, as follows:

- 2014/35/EU; Low-Voltage Directive (safety)
- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)
- 2011/65/EU; Restriction of Hazardous Substances (RoHS)

Product Certifications and Declarations

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for NI products, visit ni.com/product-certifications, search by model number, and click the appropriate link.

Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the *Commitment to the Environment* web page at ni.com/environment. This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

Waste Electrical and Electronic Equipment (WEEE)



EU Customers At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region, visit ni.com/environment/weee.

电子信息产品污染控制管理办法（中国 RoHS）



中国客户 National Instruments 符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于 National Instruments 中国 RoHS 合规性信息，请登录 ni.com/environment/rohs_china。(For information about China RoHS compliance, go to ni.com/environment/rohs_china.)

Information is subject to change without notice. Refer to the *NI Trademarks and Logo Guidelines* at ni.com/trademarks for information on NI trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering NI products/technology, refer to the appropriate location: **Help»Patents** in your software, the `patents.txt` file on your media, or the *National Instruments Patent Notice* at ni.com/patents. You can find information about end-user license agreements (EULAs) and third-party legal notices in the `readme` file for your NI product. Refer to the *Export Compliance Information* at ni.com/legal/export-compliance for the NI global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data. NI MAKES NO EXPRESS OR IMPLIED WARRANTIES AS TO THE ACCURACY OF THE INFORMATION CONTAINED HEREIN AND SHALL NOT BE LIABLE FOR ANY ERRORS. U.S. Government Customers: The data contained in this manual was developed at private expense and is subject to the applicable limited rights and restricted data rights as set forth in FAR 52.227-14, DFAR 252.227-7014, and DFAR 252.227-7015.

© 2019 National Instruments. All rights reserved.

377651B-01 June 7, 2019