

SPECIFICATIONS

PXIe-5163

PXIe, 200 MHz, 1 GS/s, 14-bit PXI Oscilloscope

Contents

Definitions.....	2
Conditions.....	2
Vertical.....	3
Analog Input.....	3
Impedance and Coupling.....	3
Voltage Levels.....	4
Accuracy.....	5
Bandwidth and Transient Response.....	6
Spectral Characteristics.....	9
Horizontal.....	15
Sample Clock.....	15
Phase-Locked Loop (PLL) Reference Clock.....	16
External Sample Clock.....	16
External Reference Clock In.....	16
Reference Clock Out.....	17
Trigger.....	17
Analog Trigger.....	18
Digital Trigger.....	18
Programmable Function Interface.....	18
AUX 0 Connector Specifications.....	19
Waveform Specifications.....	19
Memory Sanitization.....	20
Calibration.....	20
External Calibration.....	20
Self-Calibration.....	21
Calibration Specifications.....	21
Software.....	21
Driver Software.....	21
Application Software.....	21
Interactive Soft Front Panel and Configuration.....	21
Synchronization.....	22
Synchronization with the NI-TCI API.....	22
Power Requirements.....	23
Physical.....	23
Bus Interface.....	23



Environmental Characteristics.....	23
Product Certifications and Declarations.....	24

Definitions

Warranted specifications describe the performance of a model under stated operating conditions and are covered by the model warranty. Warranted specifications account for measurement uncertainties, temperature drift, and aging. Warranted specifications are ensured by design or verified during production and calibration.

Characteristics describe values that are relevant to the use of the model under stated operating conditions but are not covered by the model warranty.

- *Typical* specifications describe the performance met by a majority of models.
- *Nominal* specifications describe an attribute that is based on design, conformance testing, or supplemental testing.
- *Measured* specifications describe the measured performance of a representative model.

Specifications are *Nominal* unless otherwise noted.

Conditions

Specifications are valid under the following conditions unless otherwise noted.

- All vertical ranges, bandwidths, and bandwidth-limiting filters
- Sample rate set to 1 GS/s
- Onboard sample clock locked to onboard reference clock
- 15-minute warm-up time at ambient temperature

Warranted specifications are valid under the following conditions unless otherwise noted.

- Ambient temperature range of 0 °C to 50 °C
- Calibration cycle maintained
- Chassis configured:¹
 - PXI Express chassis fan speed set to HIGH
 - Foam fan filters removed if present
 - Empty slots contain PXI chassis slot blockers and filler panels
- External calibration performed at 23 °C ± 3 °C
- Within ±5 °C of temperature at last self-calibration as reported by onboard temperature sensor

Typical specifications are valid under the following conditions unless otherwise noted.

- Ambient temperature range of 0 °C to 50 °C

¹ For more information about cooling, refer to the *Maintain Forced-Air Cooling Note to Users* available at ni.com/manuals.

Vertical

Analog Input

Number of channels	Two (simultaneously sampled)
Input type	Referenced single-ended
Connectors	BNC, ground referenced

Impedance and Coupling

Input impedance	50 Ω \pm 1.25%, typical 1 M Ω \pm 0.5%, typical
Input capacitance (1 M Ω)	20.2 pF \pm 2.5 pF, typical
Input coupling	AC DC

Figure 1. 50 Ω Voltage Standing Wave Ratio (VSWR)


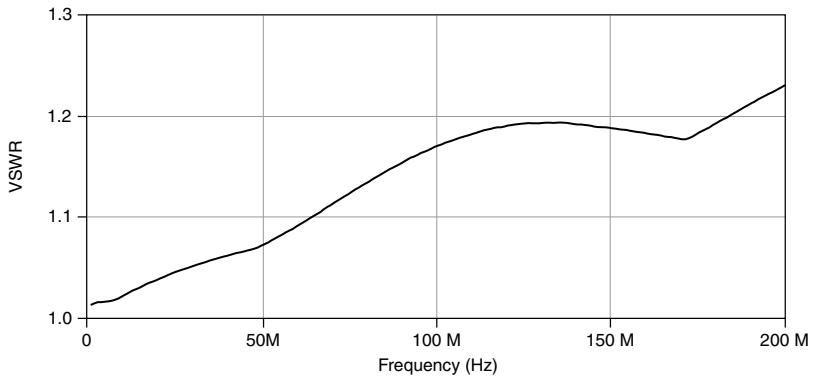


Figure 2. 50 Ω Input Return Loss

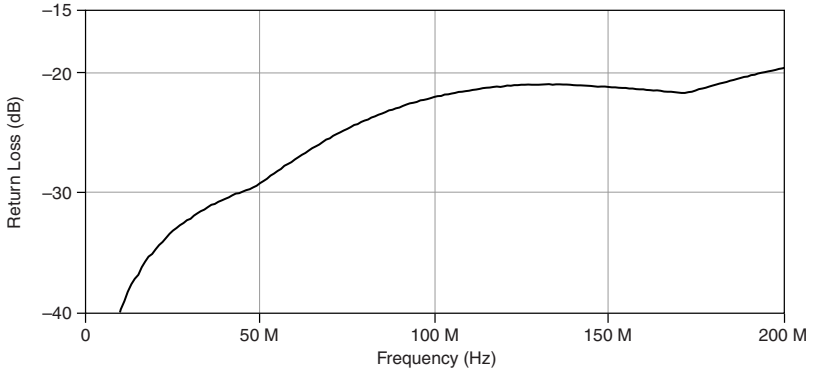

Voltage Levels

50 Ω FS input range (V_{pk-pk})

0.25 V
0.5 V
1 V
2.5 V
5 V

Table 1. 1 MΩ FS Input Range and Vertical Offset Range

Input Range (V_{pk-pk})	Vertical Offset Range ² (V)
0.25 V	±5
0.5 V	±5
1 V	±5
2.5 V	±10 or ±248.75
5 V	±10 or ±247.5
10 V	±10 or ±245
25 V	±50 or ±237.5

² For input ranges between 2.5 V_{pk-pk} and 100 V_{pk-pk} , two offset ranges are possible. The driver software automatically picks the offset range that provides the highest resolution and accuracy.

Table 1. 1 M Ω FS Input Range and Vertical Offset Range (Continued)

Input Range (V _{pk-pk})	Vertical Offset Range ² (V)
50 V	± 50 or ± 225
100 V	± 50 or ± 200

Maximum input overload

50 Ω	$ \text{Peaks} \leq 5 \text{ V}$
1 M Ω ³	250 V RMS



Notice Signals exceeding the maximum input overload may cause damage to the device.

Accuracy

Resolution	14 bits
DC accuracy ^{4, 5}	
50 Ω	$\pm[(0.5\% \times \text{Reading}) + (0.2\% \text{ of FS})]$, warranted
1 M Ω	$\pm[(0.65\% \times \text{Reading} - \text{Vertical Offset}) + (0.4\% \times \text{Vertical Offset}) + (0.2\% \text{ of FS}) + 0.15 \text{ mV}]$, warranted
DC drift ⁶	$\pm 0.0013 \text{ dB per } ^\circ\text{C}$ at 50 kHz
AC amplitude accuracy ⁴	$\pm 0.225 \text{ dB}$ at 50 kHz, warranted

Crosstalk⁷

Table 2. 50 Ω Crosstalk

Frequency	Level
1 MHz	-100 dB
10 MHz	-100 dB

² For input ranges between 2.5 V_{pk-pk} and 100 V_{pk-pk}, two offset ranges are possible. The driver software automatically picks the offset range that provides the highest resolution and accuracy.

³ Derate above 500 kHz at 20 dB/dec until 5 MHz, then derate at 10 dB/dec.

⁴ Within ± 5 $^\circ\text{C}$ of self-calibration temperature.

⁵ Applies after averaging data for 8.5 ms.

⁶ Used to calculate errors when onboard temperature changes more than ± 3 $^\circ\text{C}$ from the self-calibration temperature.

Table 2. 50 Ω Crosstalk (Continued)

Frequency	Level
100 MHz	-85 dB
200 MHz	-75 dB

Table 3. 1 M Ω Crosstalk

Frequency	Level	
	0.25 V to 10 V (V_{pk-pk})	25 V to 100 V (V_{pk-pk})
1 MHz	-85 dB	-70 dB
10 MHz	-85 dB	-70 dB
100 MHz	-75 dB	-55 dB
200 MHz	-70 dB	-50 dB

Bandwidth and Transient Response

Bandwidth (-3 dB)^{8, 9} 200 MHz, warranted

Bandwidth-limiting filters^{8, 9}

Lowpass filters 20 MHz
30 MHz
150 MHz

Highpass filters 90 Hz
450 Hz

Passband amplitude flatness (at <150 MHz)^{8, 9}

50 Ω ± 0.5 dB, warranted

1 M Ω ± 0.7 dB, typical

AC-coupling cutoff (-3 dB)

50 Ω ¹⁰ 40 kHz

1 M Ω ⁹ 7.5 Hz

⁷ Crosstalk is measured on one channel with a test signal applied to the other channel and the same range setting on both channels.

⁸ Normalized to 50 kHz.

⁹ For 1 M Ω mode, verified using a 50 Ω source and 50 Ω feed-through terminator.

¹⁰ Verified using a 50 Ω source.

Figure 3. 50 Ω Full Bandwidth Frequency Response, 1 V_{pk-pk}, Measured


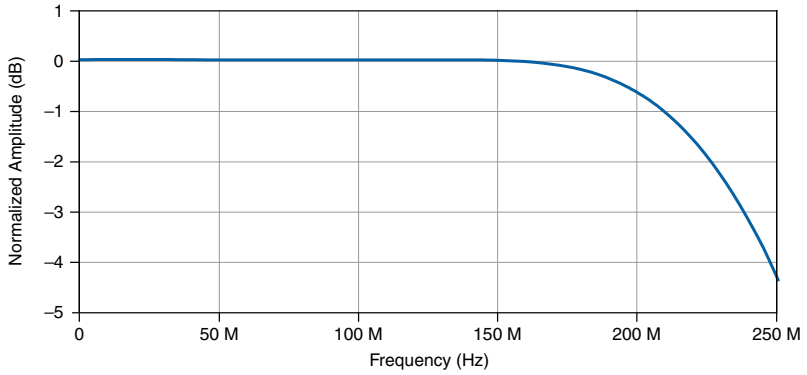


Figure 4. 50 Ω Full Bandwidth Frequency Response Zoomed, 1 V_{pk-pk}, Measured

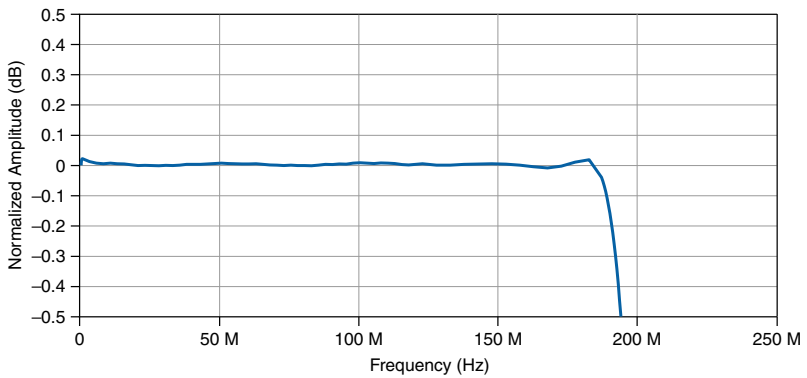

¹¹ 50% FS input pulse.

Figure 5. 50 Ω 150 MHz Bandwidth Frequency Response, 1 V_{pk-pk}, Measured

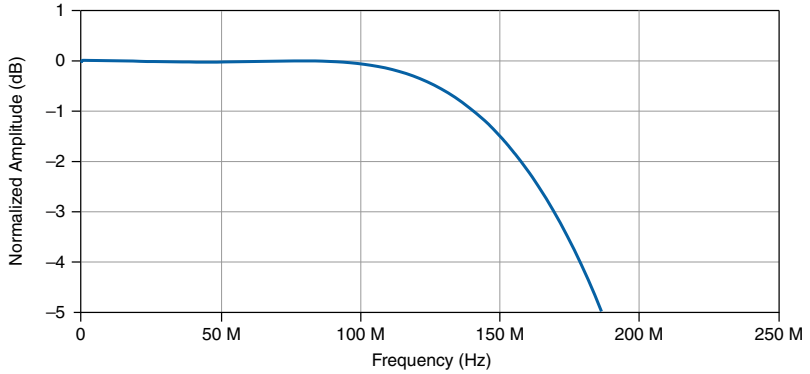


Figure 6. 1 M Ω Full Bandwidth Frequency Response, 1 V_{pk-pk}, Measured

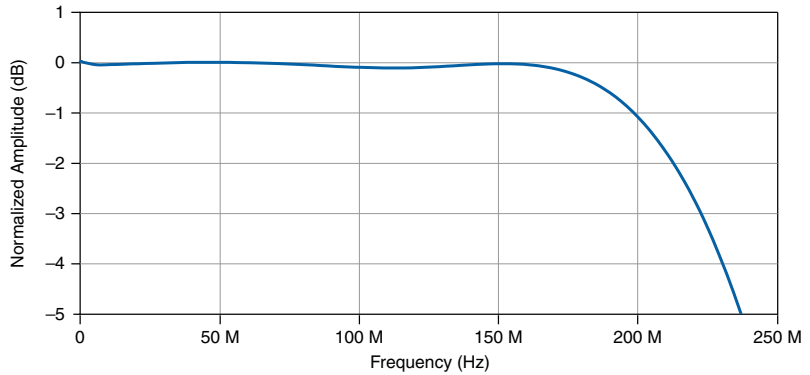


Figure 7. 1 M Ω Full Bandwidth Frequency Response Zoomed, 1 V_{pk-pk}, Measured


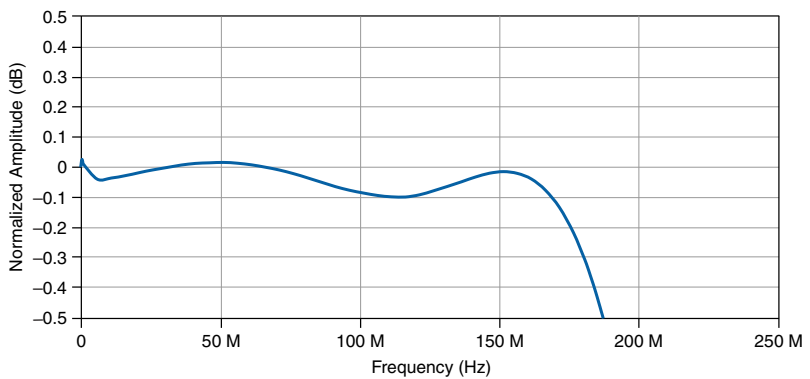


Figure 8. 1 M Ω 150 MHz Bandwidth Frequency Response, 1 V_{pk-pk}, Measured

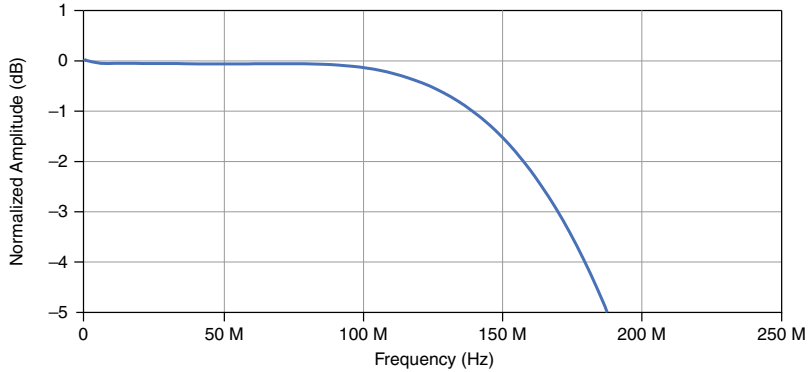

Spectral Characteristics

50 Ω Spectral Characteristics¹²

Table 4. Spurious-Free Dynamic Range (SFDR)¹³

Input Range (V _{pk-pk})	<100 MHz, Full Bandwidth (dBc)
0.25 V	-70
0.5 V	-73
1 V	-73
2.5 V	-73
5 V	-70

Table 5. Total Harmonic Distortion (THD)¹⁴

Input Range (V _{pk-pk})	<50 MHz, Full Bandwidth (dBc)	≥50 MHz to ≤100 MHz, Full Bandwidth (dBc)
0.25 V	-73	-69
0.5 V	-73	-72
1 V	-72	-70

¹² Excludes ADC interleaving spurs.

¹³ -1 dBFS input signal corrected to FS. 1 kHz resolution bandwidth.

¹⁴ 1 dBFS input signal corrected to FS. Includes the second through the fifth harmonics.


Table 5. Total Harmonic Distortion (THD)¹⁴ (Continued)

Input Range (V_{pk-pk})	<50 MHz, Full Bandwidth (dBc)	≥ 50 MHz to ≤ 100 MHz, Full Bandwidth (dBc)
2.5 V	-72	-68
5 V	-72	-69

Table 6. Effective Number of Bits (ENOB)¹³

Input Range (V_{pk-pk})	<100 MHz, Full Bandwidth	<100 MHz, 150 MHz Filter
0.25 V	10.5	10.7
0.5 V	10.7	10.9
1 V	10.7	11.0
2.5 V	10.9	11.1
5 V	10.8	11.0

Figure 9. 50 Ω Single-Tone Spectrum, 1 V_{pk-pk} Input Range, 150 MHz Filter, 9.9 MHz Input Tone at -1 dBFS, Measured

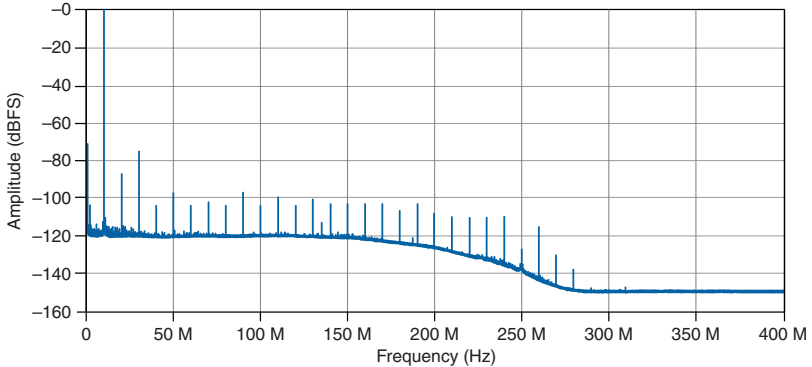

¹⁴ 1 dBFS input signal corrected to FS. Includes the second through the fifth harmonics.

Figure 10. 50 Ω Single-Tone Spectrum, 1 V_{pk-pk} Input Range, Full Bandwidth, 9.9 MHz Input Tone at -1 dBFS, Measured


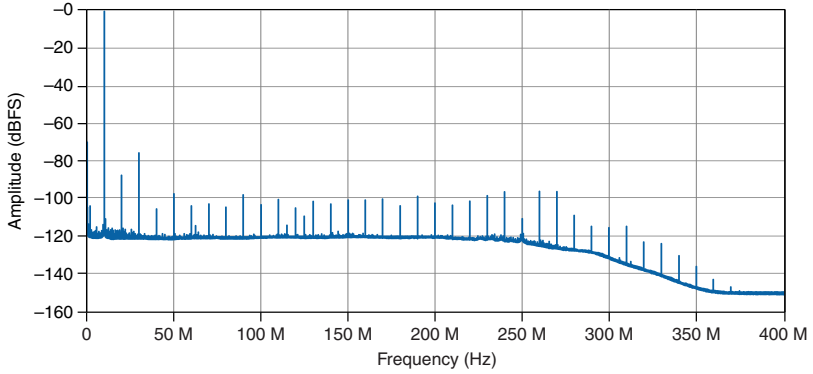


Figure 11. 50 Ω Single-Tone Spectrum, 1 V_{pk-pk} Input Range, Full Bandwidth, 99.9 MHz Input Tone at -1 dBFS, Measured

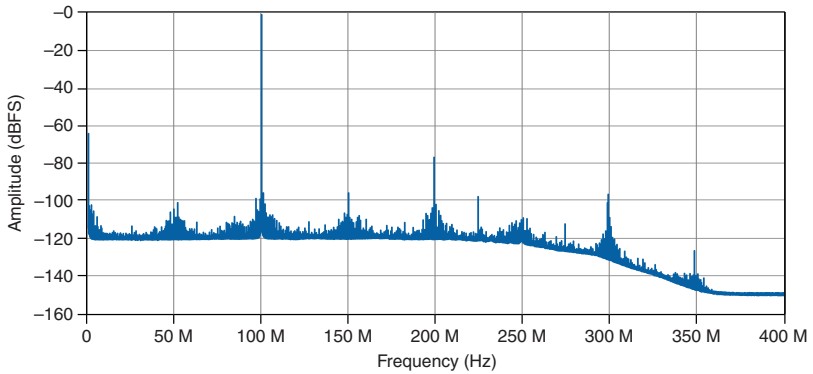

1 MΩ Spectral Characteristics^{12, 15}

Table 7. Spurious-Free Dynamic Range (SFDR)¹³

Input Range (V _{pk-pk})	<100 MHz, Full Bandwidth (dBc)
0.25 V	-61
0.5 V	-56
1 V	-49

Table 7. Spurious-Free Dynamic Range (SFDR)¹³ (Continued)

Input Range (V_{pk-pk})	<100 MHz, Full Bandwidth (dBc)
2.5 V	-58
5 V	-52

Table 8. Total Harmonic Distortion (THD)¹⁴

Input Range (V_{pk-pk})	<50 MHz, Full Bandwidth (dBc)	≥ 50 MHz to ≤ 100 MHz, Full Bandwidth (dBc)
0.25 V	-72	-62
0.5 V	-67	-56
1 V	-60	-50
2.5 V	-69	-58
5 V	-63	-53

Table 9. Effective Number of Bits (ENOB)¹³

Input Range (V_{pk-pk})	<100 MHz, Full Bandwidth	<100 MHz, 150 MHz Filter
0.25 V	10.5	10.7
0.5 V	10.7	10.9
1 V	10.7	11.0
2.5 V	10.9	11.1
5 V	10.8	11.0

¹⁵ Verified using a 50 Ω source and 50 Ω feed-through terminator.

Figure 12. 1 M Ω Single-Tone Spectrum, 1 V_{pk-pk} Input Range, 150 MHz Filter, 9.9 MHz Input Tone at -1 dBFS, Measured


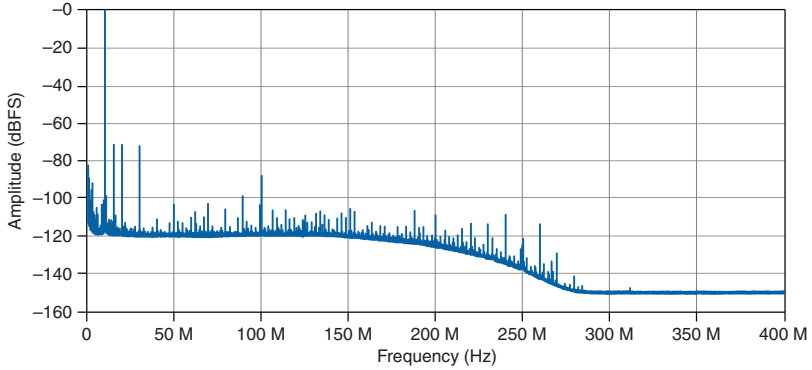


Figure 13. 1 M Ω Single-Tone Spectrum, 1 V_{pk-pk} Input Range, Full Bandwidth, 9.9 MHz Input Tone at -1 dBFS, Measured

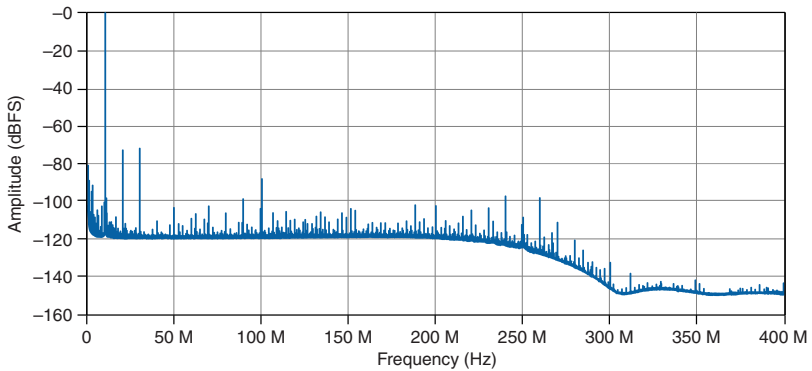

Noise¹⁶

50 Ω RMS Noise

Input Range (V _{pk-pk})	RMS Noise (% of FS)	
	Full Bandwidth, Warranted	150 MHz Filter, Typical
0.25 V	0.045	0.018
0.5 V	0.040	0.018
1 V	0.035	0.017

Input Range (V_{pk-pk})	RMS Noise (% of FS)	
	Full Bandwidth, Warranted	150 MHz Filter, Typical
2.5 V	0.030	0.017
5 V	0.030	0.014

Figure 14. 50 Ω Channel 0 Average Noise Density, 1 V_{pk-pk} Range, Measured


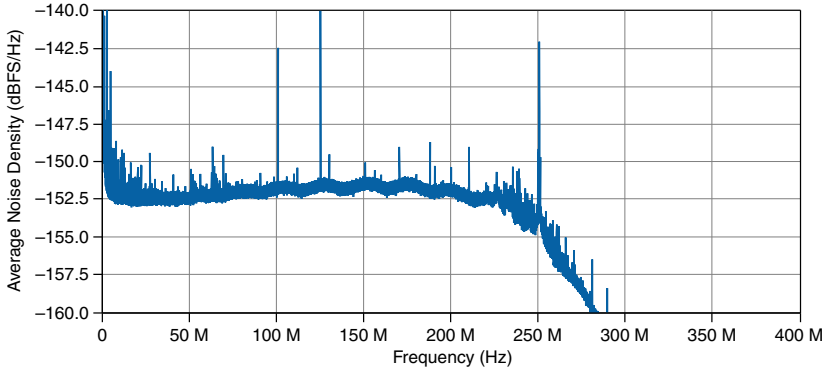


Figure 15. 50 Ω Channel 0 Average Noise Density, 0.25 V_{pk-pk} Range, Measured

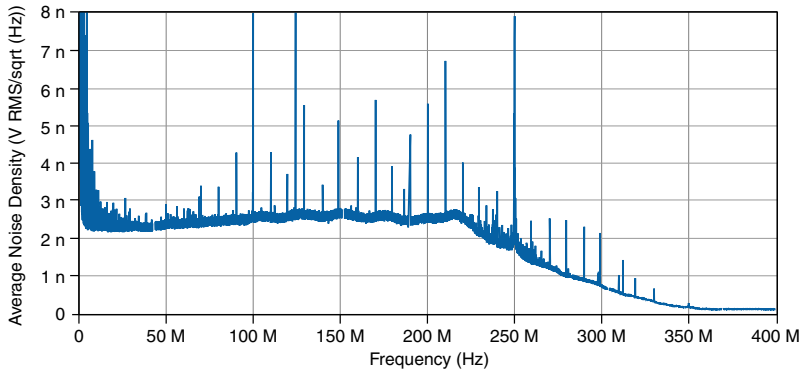

¹⁶ Verified with 50 Ω terminator connected directly to BNC input.

1 MΩ RMS Noise

Input Range (V _{pk-pk})	RMS Noise (% of FS)	
	Full Bandwidth, Warranted	150 MHz Filter, Typical
0.25 V	0.110	0.070
0.5 V	0.060	0.050
1 V	0.050	0.030
2.5 V	0.100	0.055
5 V	0.060	0.045
10 V	0.050	0.030
25 V	0.080	0.050
50 V	0.060	0.040
100 V	0.050	0.030

Horizontal

Sample Clock

Sources

Internal	Onboard clock (internal VCTCXO)
External	CLK IN (front panel SMB connector) PXIe-DSTAR_A (backplane connector)
Sample rate range, real-time ¹⁷	15.259 kS/s to 1 GS/s
Timebase frequency	1.0 GHz
Timebase accuracy	
Phase-locked to onboard clock	±5 ppm, warranted
Phase-locked to external clock	Equal to the external clock accuracy
Sample clock jitter ¹⁸	500 fs RMS

¹⁷ Divide by n decimation from 1.0 GS/s used for all rates less than 1.0 GS/s. For more information about the sample clock and decimation, refer to the *NI High-Speed Digitizers Help*.

¹⁸ Integrated from 100 Hz to 10 MHz. Includes the effects of the converter aperture uncertainty and the clock circuitry jitter. Excludes trigger jitter.

Phase-Locked Loop (PLL) Reference Clock

Sources

Internal	Onboard clock (internal VCTCXO) PXI_CLK10 (backplane connector)
External (10 MHz)	CLK IN (front panel SMB connector) AUX 0 CLK IN (front panel MHDMMR connector)
Duty cycle tolerance	45% to 55%, typical

External Sample Clock

Source	CLK IN (front panel SMB connector)
Impedance	50 Ω
Coupling	AC
Frequency	1.0 GHz
Input voltage range, when configured as a sample clock	632 mV _{pk-pk} to 5 V _{pk-pk} (0 dBm to 18 dBm), typical
Maximum input overload, when configured as a sample clock	6 V _{pk-pk}
Duty cycle tolerance	45% to 55%, typical

External Reference Clock In

Sources	CLK IN (front panel SMB connector) AUX 0 CLK IN (front panel MHDMMR connector)
Impedance	50 Ω
Coupling	AC
Frequency ¹⁹	10 MHz
Input voltage range, when configured as a reference clock	623 mV _{pk-pk} to 5 V _{pk-pk} (0 dBm to 18 dBm), typical
Maximum input overload, when configured as a reference clock	6 V _{pk-pk}

¹⁹ The PLL reference clock must be accurate to ± 25 ppm.

Reference Clock Out

Source	PXI_CLK10 (backplane connector)
Destination	AUX 0 CLK OUT (front panel MHDMM connector)
Output impedance	50 Ω
Logic type	3.3 V CMOS
Maximum current drive	± 12 mA

Trigger

Supported triggers	Reference (stop) trigger Reference (arm) trigger Start trigger Advance trigger
Trigger types	Edge Window Hysteresis Digital Immediate Software
Trigger sources	CH 0 CH 1 SMB PFI 0 AUX 0 PFI <0..7> PXI_Trig <0..6> Software
Trigger delay	from 0 ns to 2.25×10^{15} ns $((2^{51} - 1) \times \text{Sample Clock Period ns})$
Dead time	496 ns
Hold off	From dead time to 1.84×10^{19} ns $((2^{64} - 1) \times \text{Sample Clock Period ns})$

Analog Trigger

Sources	CH 0 CH 1
Time resolution	
Interpolator enabled	$\text{Sample Clock Period} / 1024 = 0.977 \text{ ps}$
Interpolator disabled	Sample clock period (1 ns)
Trigger filters	
Low Frequency (LF) Reject	100 kHz
High Frequency (HF) Reject	100 kHz
Trigger accuracy ²⁰	0.5% of FS
Trigger jitter ²⁰	15 ps RMS
Minimum threshold duration ²¹	Sample clock period

Digital Trigger

Sources	PFI 0 (front panel SMB connector) AUX 0 PFI <0..7> (front panel MHDMMR connector) PXI_Trig <0..6> (backplane connector)
Time resolution	8 ns

Programmable Function Interface

Connectors	AUX 0 PFI <0..7> (front panel MHDMMR connector) PFI 0 (front panel SMB connector)
Direction	Bidirectional per channel
As an input (trigger)	
Destination	Start trigger (acquisition arm) Reference (stop) trigger Arm reference trigger Advance trigger
Input impedance	49.9 k Ω

²⁰ Analog triggers. For input frequencies less than 150 MHz.

²¹ Data must exceed each corresponding trigger threshold for at least the minimum duration to ensure analog triggering.

V_{IH}	2 V, typical
V_{IL}	0.8 V, typical
Recommended input range	3.3 V
Maximum input overload	0 to 3.3 V (5 V tolerant)
Maximum frequency	50 MHz
Minimum pulse width	10 ns
As an output (event)	
Sources	Ready for Start Start trigger (acquisition arm) Ready for Reference Reference (stop) trigger End of Record Ready for Advance Advance trigger Done (end of acquisition) Probe compensation ²²
Output impedance	50 Ω
Logic type	3.3 V CMOS
Maximum current drive	12 mA
Maximum frequency	50 MHz
Minimum pulse width	10 ns

AUX 0 Connector Specifications

Connector	MHDMR
Voltage output	3.3 V \pm 10%
Maximum current drive on +3.3 V	200 mA
Output impedance on +3.3 V	<1 Ω

Waveform Specifications

Onboard memory size ²³	512 MB
Minimum record length	1 sample
Number of pretrigger samples	Zero up to (<i>Record Length</i> - 1)

²² 1 kHz, 50% duty cycle square wave, SMB PFI 0 only.

²³ Onboard memory is shared among all enabled channels.

Number of posttrigger samples	Zero up to <i>Record Length</i>
Maximum number of records in onboard memory ²⁴	1,398,101 for 512 MB

Table 10. Examples of Allocated Onboard Memory Per Record (512 MB Onboard Memory)

Channels	Bytes per Sample	Max Records per Channel	Record Length	Allocated Onboard Memory per Record
1	2	1,398,101	1	384
1	2	223,696	1,000	2,400
1	2	26,379	10,000	20,352
1	2	1	268,435,265	536,870,912
2	2	1,398,101	1	384
2	2	121,574	1,000	4,416
2	2	13,283	10,000	33,216
2	2	1	134,217,633	536,870,912

Memory Sanitization

For information about memory sanitization, refer to the letter of volatility for your device, which is available at ni.com/manuals.

Calibration

External Calibration

External calibration yields the following benefits:

- Corrects for gain and offset errors of the onboard references used in self-calibration.
- Adjusts timebase accuracy.
- Compensates the 1 M Ω ranges.
- Corrects the frequency response for all ranges.

All calibration constants are stored in nonvolatile memory.

²⁴ You can exceed these numbers if you fetch records while acquiring data. For more information, refer to the *NI High-Speed Digitizers Help*.

Self-Calibration

Self-calibration is done on software command. The calibration corrects for the following aspects:

- Gain
- Offset
- Interleaving spurs
- Intermodule synchronization errors

Refer to the *NI High-Speed Digitizers Help* for information about when to self-calibrate the device.

Calibration Specifications

Interval for external calibration	2 years
Warm-up time ²⁵	15 minutes

Software

Driver Software

Driver support for this device was first available in NI-SCOPE 18.7.

NI-SCOPE is an IVI-compliant driver that allows you to configure, control, and calibrate the PXIe-5163. NI-SCOPE provides application programming interfaces for many development environments.

Application Software

NI-SCOPE provides programming interfaces, documentation, and examples for the following application development environments:

- LabVIEW
- LabWindows™/CVI™
- Measurement Studio
- Microsoft Visual C/C++
- .NET (C# and VB.NET)

Interactive Soft Front Panel and Configuration

When you install NI-SCOPE on a 64-bit system, you can use InstrumentStudio to monitor, control, and record measurements from the PXIe-5163.

InstrumentStudio is an application that allows you to perform interactive measurements on several different NI device types in a single application.

²⁵ Warm-up begins after the chassis and controller or PC is powered and NI-SCOPE is loaded and recognizes the PXIe-5163.

Interactive control of the PXIe-5163 was first available via InstrumentStudio in NI-SCOPE 18.7. InstrumentStudio is included on the NI-SCOPE media.

NI Measurement & Automation Explorer (MAX) also provides interactive configuration and test tools for the PXIe-5163. MAX is included on the driver media.

Synchronization

Channel-to-channel skew, between the channels of a PXIe-5163

50 Ω	<100 ps
1 M Ω	<150 ps



Note The channels of a PXIe-5163 are automatically synchronized when they are in the same NI-SCOPE session.

Synchronization with the NI-TCIk API²⁶

NI-TCIk is an API that enables system synchronization of supported PXI modules in one or more PXI chassis, which you can use with the PXIe-5163 and NI-SCOPE.

NI-TCIk uses a shared Reference Clock and triggers to align the Sample Clocks of PXI modules and synchronize the distribution and reception of triggers. These signals are routed through the PXI chassis backplane without external cable connections between PXI modules in the same chassis.

Module-to-module skew, between PXIe-5163 modules using NI-TCIk²⁷

NI-TCIk synchronization without manual adjustment ²⁸	
Skew, peak-to-peak ²⁹	300 ps, typical
NI-TCIk synchronization with manual adjustment ²⁸	
Skew, average	≤ 10 ps
Sample Clock delay/adjustment resolution	3.5 ps

²⁶ NI-TCIk installs with NI-SCOPE.

²⁷ Specifications are valid under the following conditions:

- All modules installed in the same PXI Express chassis
- NI-TCIk used to align the sample clocks of each module
- Modules synchronized without using an external sample clock
- All parameters set to identical values for each module
- Self-calibration completed

²⁸ Manual adjustment is the process of minimizing synchronization jitter and skew by adjusting Trigger Clock (TCIk) signals using the instrument driver.

²⁹ *Skew* is the misalignment between module timing across slots of a chassis and is caused by clock and analog path delay differences.

Power Requirements

Current draw

+3.3 V DC	1.97 A
+12 V DC	1.63 A

Power draw

+3.3 V DC	6.5 W
+12 V DC	19.5 W
Total	26 W

Physical

Dimensions	3U, one-slot, PXI Express Gen 2 x8 module 21.26 cm × 12.88 cm × 2.0 cm (8.37 in. × 5.07 in. × 0.787 in.)
------------	----------------------------------------------------------------------------------------------------------------

Weight	460 g (16.2 oz)
--------	-----------------

Bus Interface

Form factor	PXI Express (x8 Gen 2)
-------------	------------------------

Slot compatibility	PXI Express or hybrid
--------------------	-----------------------

Environmental Characteristics

Temperature

Operating	0 °C to 50 °C
Storage	-40 °C to 71 °C

Humidity

Operating	10% to 90%, noncondensing
Storage	5% to 95%, noncondensing

Pollution Degree	2
Maximum altitude	4,600 m (570 mbar) (at 25 °C ambient temperature)
Shock and Vibration	
Operating vibration	5 Hz to 500 Hz, 0.3 g RMS
Non-operating vibration	5 Hz to 500 Hz, 2.4 g RMS
Operating shock	30 g, half-sine, 11 ms pulse

Product Certifications and Declarations

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for NI products, visit ni.com/product-certifications, search by model number, and click the appropriate link.

Information is subject to change without notice. Refer to the *NI Trademarks and Logo Guidelines* at ni.com/trademarks for information on NI trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering NI products/technology, refer to the appropriate location: **Help>Patents** in your software, the `patents.txt` file on your media, or the *National Instruments Patent Notice* at ni.com/patents. You can find information about end-user license agreements (EULAs) and third-party legal notices in the `readme` file for your NI product. Refer to the *Export Compliance Information* at ni.com/legal/export-compliance for the NI global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data. NI MAKES NO EXPRESS OR IMPLIED WARRANTIES AS TO THE ACCURACY OF THE INFORMATION CONTAINED HEREIN AND SHALL NOT BE LIABLE FOR ANY ERRORS. U.S. Government Customers: The data contained in this manual was developed at private expense and is subject to the applicable limited rights and restricted data rights as set forth in FAR 52.227-14, DFAR 252.227-7014, and DFAR 252.227-7015.

© 2019—2020 National Instruments Corporation. All rights reserved.

376590C-01 September 29, 2020