
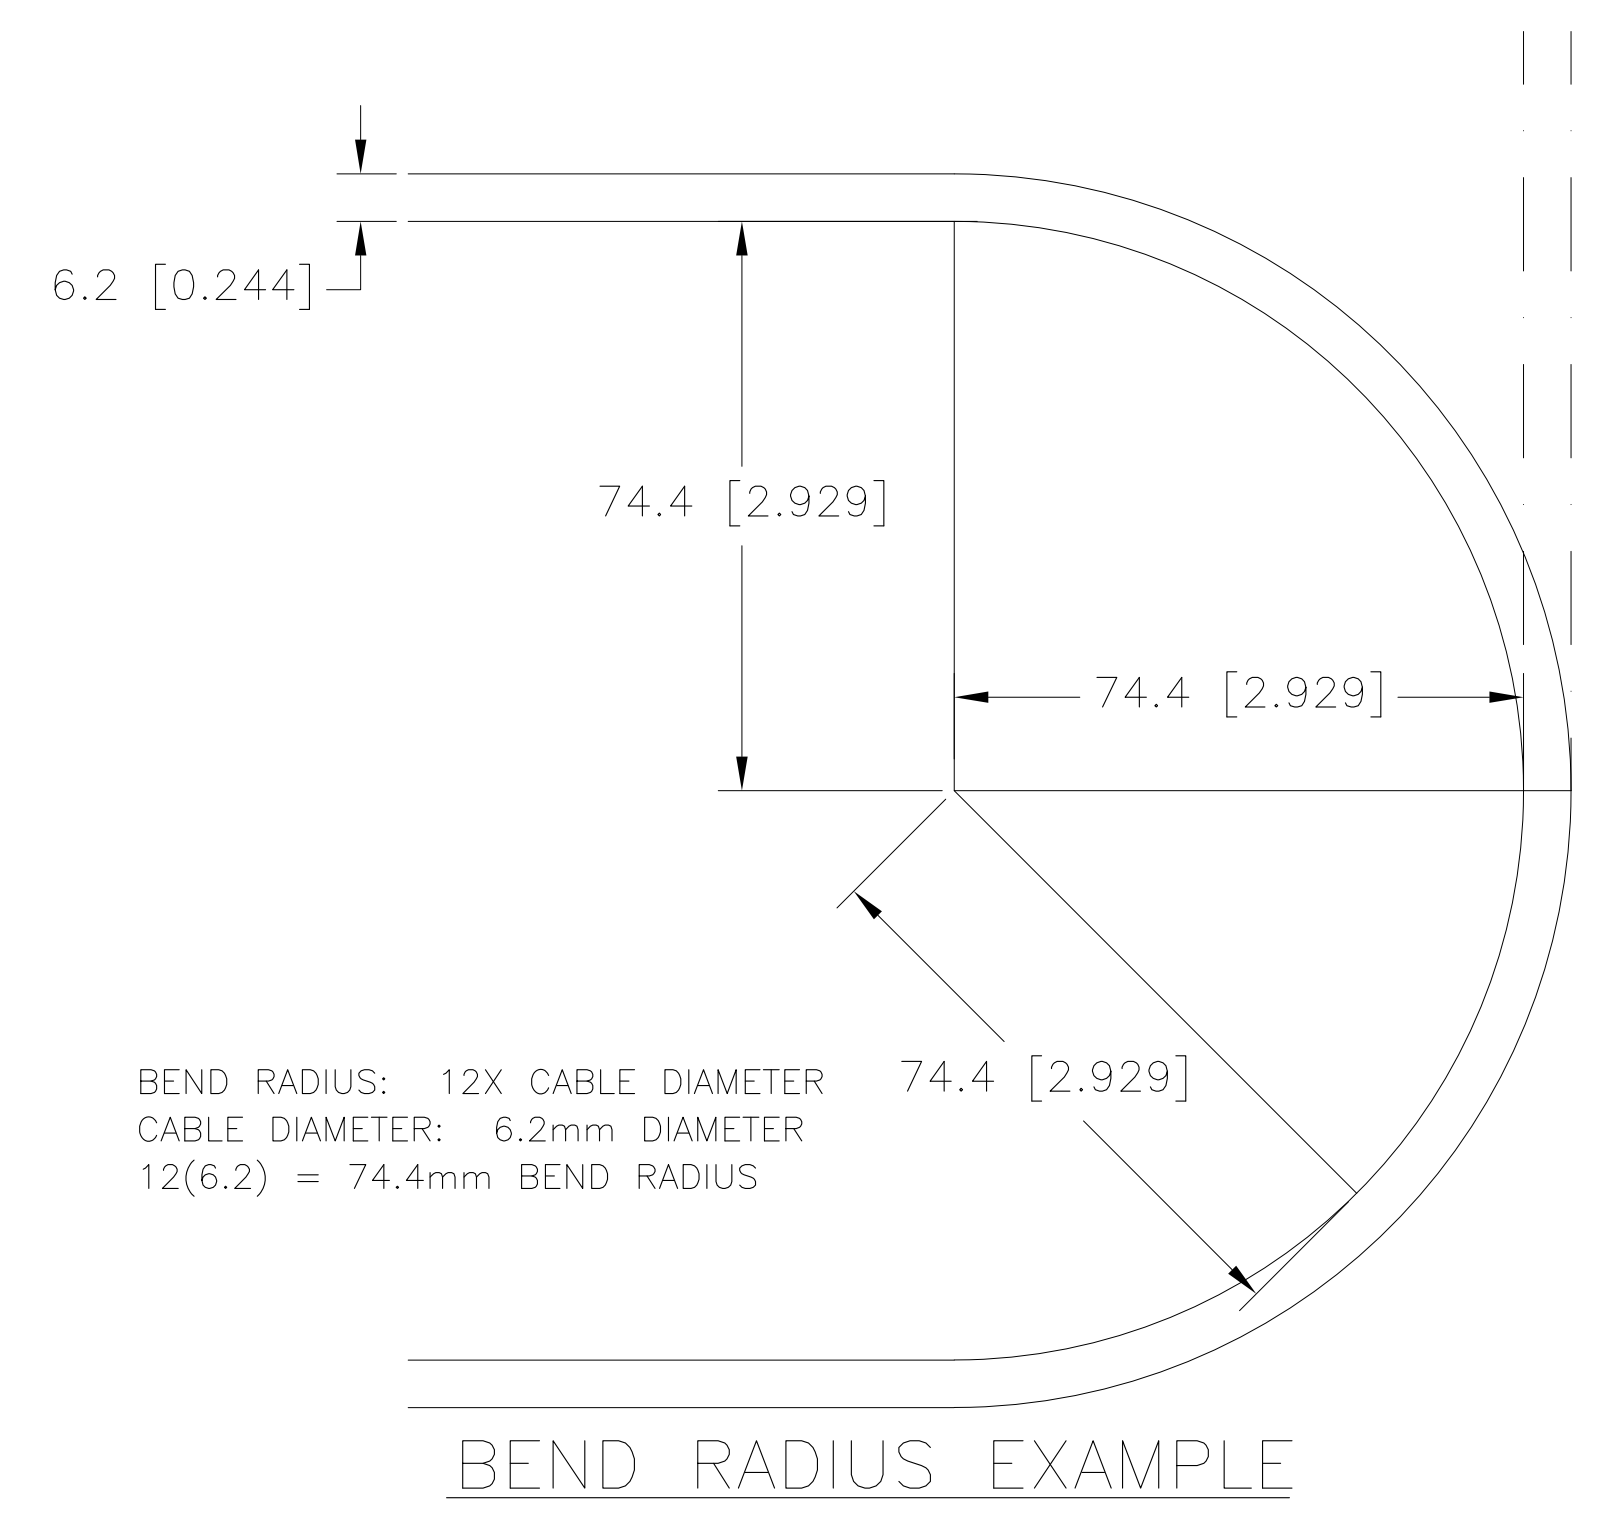


This document contains confidential and proprietary information which is the property of NI. This proprietary information is supplied to the possessor pursuant to the possessor's agreement to do the following:

1. to maintain this document in confidence;
2. not to reproduce, publish or copy it in whole or in part without written permission; and
3. not to use this document as a basis for the manufacture or sale of goods without written permission.

©COPYRIGHT 2020 NATIONAL INSTRUMENTS CORPORATION. ALL RIGHTS RESERVED.

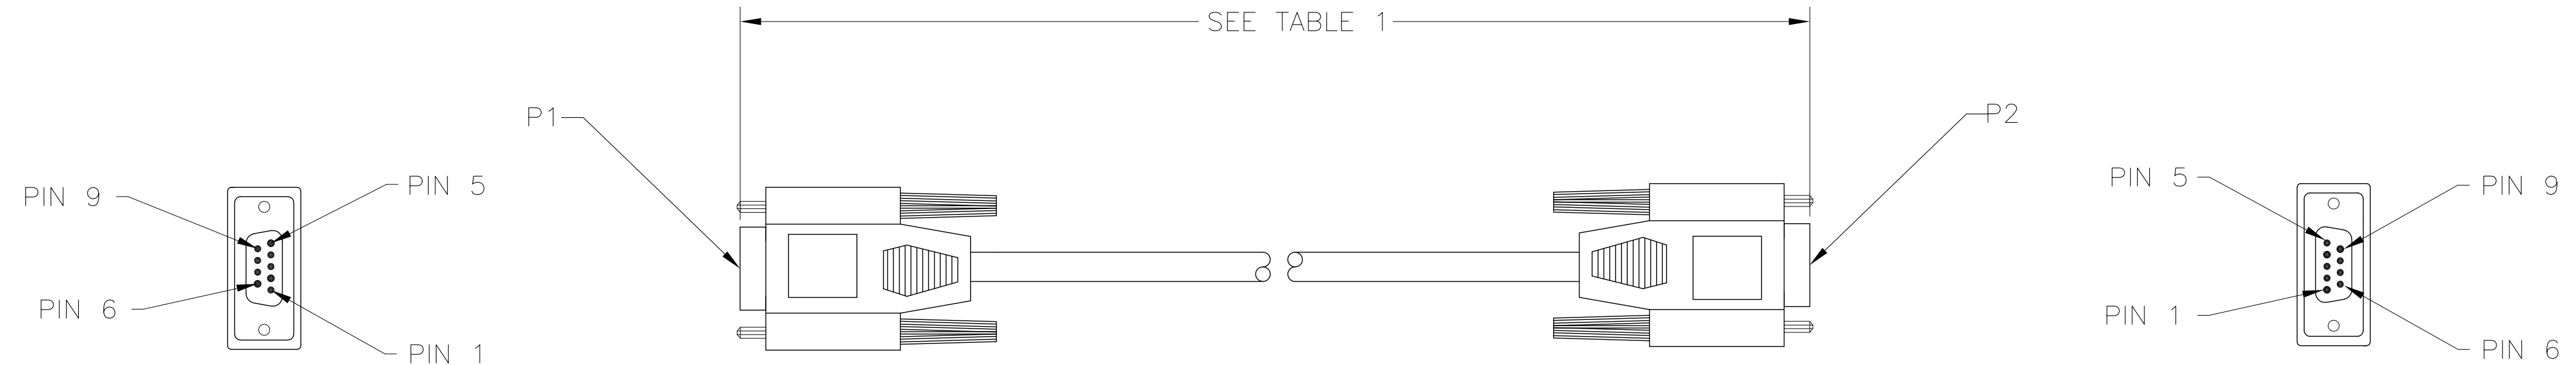

| WIRE LIST | |
|-----------|--------|
| P1 | P2 |
| 1 | 1 |
| 2 | 2 |
| 3 | 3 |
| 4 | 4 |
| 5 | 5 |
| 6 | 6 |
| 7 | 7 |
| 8 | 8 |
| 9 | 9 |
| SHIELD | SHIELD |

| TABLE 1 | |
|----------|-----------|
| LENGTH | TOLERANCE |
| <2m | +5cm |
| 2m TO 5m | +10cm |
| <5m | +15cm |

CONDUCTOR SPECIFICATIONS:


CONDUCTOR: 24AWG TINNED COPPER, 0.6 MILLIMETER DIAMETER
 INSULATION: SR-PVC, 1.10 MILLIMETER DIAMETER

BEND RADIUS: 12X CABLE DIAMETER (SEE EXAMPLE) PER SPECIFICATIONS
 2014 NEC SECTION 300.34 CONDUCTOR BEND RADIUS
 2014 NEC SECTION 300.24 BENDING RADIUS

1. REFER TO PRODUCT MANUAL ON NI.COM FOR MORE DETAILS.

NOTES: UNLESS OTHERWISE SPECIFIED.

CUSTOMER DRAWING
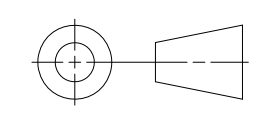
| | |
|---|---|
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS AND [INCHES] | NI.COM AUSTIN, TEXAS |
| DO NOT SCALE DRAWING THIRD ANGLE PROJECTION | TITLE DB9F TO DB9M RS232 |
|  | SIZE CODE IDENT NO. DATE D 7U296 09/01/2020 |
| SCALE: 1/1 | SHEET 1 OF 1 |